

541014

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 July 2004 (29.07.2004)

PCT

(10) International Publication Number
WO 2004/062409 A1

(51) International Patent Classification⁷: **A42B 3/00**

(21) International Application Number:
PCT/KR2003/000036

(22) International Filing Date: 9 January 2003 (09.01.2003)

(25) Filing Language: Korean

(26) Publication Language: English

(71) Applicant and

(72) Inventor: **LEE, Dong-Seon** [KR/KR]; Ga-201
Ehwadasedaejuteak 2/3, 932-15 Mansoo-dong, Nam-
dong-gu, Incheon 405-240 (KR).

(74) Agent: **LEE, Young-Pil**; The Cheonghwa Building,
1571-18 Seocho-dong, Seocho-gu, Seoul 137-874 (KR).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR MANUFACTURING SAFETY HELMET AND SAFETY HELMET MANUFACTURED WITH THE
SAME

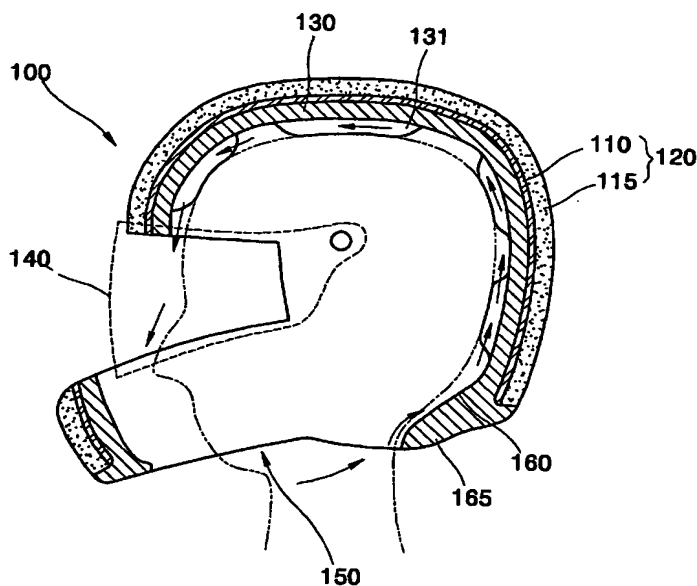

(57) Abstract: An improved lightweight, shock-resistant and tension-proof safety helmet manufactured at a low cost is provided. The safety helmet includes a shell, which is manufactured by molding a liner using a thermoplastic resin, covering the outside of the liner with a reinforced fiber sheet, preparing a mold, disposing the liner upside down on a concave molding side of the mold, injecting a thermosetting resin between the liner and the molding side, hardening the thermosetting resin, and detaching the hardened thermosetting resin from the mold; and a cushion pad attached to the inside of the liner. The safety helmet may include a guide surface referred to as a wind flap in order to guide external air into the safety helmet.

WO 2004/062409 A1